

Energizer®

UNSERE
LEISTUNGS-
STÄRKSTE NR. 1



APPLIKATIONSTABELLE



TABELA DE MEDIDAS PARA PILHAS DE RELÓGIO
 TABLA DE MEDIDAS PARA PILAS DE RELOJ
 GUIDE D'ÉQUIPEMENT DE PILLES POUR MONTRES
 APPLIKATIONSTABELLE FÜR UHRENBATTERIEN
 DIMENSION GUIDE FOR WATCH BATTERIES

| SILVER OXIDE 1,5 V | ø 4,8 mm | | | | ø 5,8 mm | | | | ø 6,8 mm | | | | ø 7,9 mm | | | | ø 9,5 mm | | | | ø 11,6 mm | | | | |
|--------------------|----------|-----|------|-----|----------|------|------|-----|----------|------|------|-----|----------|------|------|-----|----------|------|------|-----|-----------|-----|---------|------|-------|
| | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | Ref. | mAh | |
| 1.25 | | | | | 335 | 6.0 | | | | | | | | | | | | | | | | | | | |
| 1.30 | | | | | | | | | | | | | 346 | 9.5 | | | | | | | | | | | |
| 1.45 | | | | | | | | | | | | | 341 | 15.0 | | | | | | | | | | | |
| 1.65 | 337 | 8.3 | | | 317 | 11.5 | | | 321 | 15.0 | | | 315 | 23.0 | | | 373 | 30.0 | | | | | 365 | 30.0 | |
| 2.05 | | | | | | | | | | | | | | | | | | | | | 391 | 60 | | | |
| 2.10 | | | | | | | | | | | | | 362/361 | | 27.0 | | 371/370 | | 34.0 | | | | | | |
| 2.15 | | | | | 379 | 14.5 | | | 364/363 | | 20.5 | | | | | | | | | | | | | | |
| 2.60 | | | | | | | | | 377/376 | | 24.0 | | 397/396 | | 31.0 | | | | | | | | | | |
| 2.70 | | | | | 319 | 22.5 | | | | | | | | | | | 395/399 | | 50.0 | | | | | | |
| 3.00 | | | | | | | | | | | | | | | | | | | | | 390/389 | | 90.0 | | |
| 3.10 | | | | | | | | | | | | | 329 | 39.0 | | | | | | | | | | | |
| 3.60 | | | | | | | | | | | | | 392/384 | | 44.0 | | 394/380 | | 64.0 | | 344 | 100 | | | |
| 4.20 | | | | | | | | | | | | | | | | | | | | | | | 386 | 110 | |
| 5.40 | | | | | | | | | | | | | | | | | 393 | 75 | | | | | 357/303 | | 150.0 |

| LITHIUM 3,0 V | ø 10,0 mm | | | ø 12,5 mm | | | ø 16,0 mm | | | ø 20,0 mm | | | ø 24,5 mm | | |
|---------------|-----------|------|-----|-----------|------|-----|-----------|-------|-----|-----------|-------|-----|-----------|-------|-----|
| | Ref. | mAh | mAh | Ref. | mAh | mAh | Ref. | mAh | mAh | Ref. | mAh | mAh | Ref. | mAh | mAh |
| 1.20 | | | | | | | | | | | | | | | |
| 1.40 | | | | 1216 | 25.0 | | 1616 | 60.0 | | 2016 | 90.0 | | | | |
| 1.60 | | | | 1220 | 37.0 | | | | | | | | | | |
| 2.0 | | | | 1225 | 48.0 | | 1620 | 81.0 | | | | | 2430 | 320.0 | |
| 2.50 | 1025 | 30.0 | | | | | | | | 2025 | 155.0 | | | | |
| 3.00 | | | | | | | | | | | | | | | |
| 3.20 | | | | | | | 1632 | 130.0 | | 2032 | 235.0 | | | | |
| 5.00 | | | | | | | | | | | | | 2450 | 620.0 | |

TYPENVERGLEICHSTABELLE




| | Size | Energizer | I.E.C | Citizen | Duracell | Gold Peak | JIS | Maxell | Panasonic | Rayovac | Renata | Seiko | Sony | Timex | Toshiba | Varta | Philips |
|--|------|-----------|------------------|----------------|----------|-------------------|------------|----------|-----------|---------|--------|----------------|-----------|--------|----------|-------|---------|
| TABELA DE EQUIVALÊNCIAS PARA PILHAS DE RELOGIO | 301 | 386 | SR 43/SR 1142 SW | 280-01/280-16 | 386/301 | GP301, GP01 | GS12, GP96 | SR43SW | SR43SW | 301/386 | 301 | SB-A8 | SR43SW | D | SR43SW | V 301 | - |
| | 303 | 357/303 | SR 44/SR 1154 SW | 208-08/280-03 | 357/303 | GP303 | GS14 | SR44SW | SR44SW | 303/357 | 303 | SB-A9 | SR44SW | A | SR44SW | V 303 | - |
| | 309 | 393 | SR 48/SR 754 SW | - | - | - | GS5 | SR754SW | SR754SW | 309/393 | 309 | SB-C3 | SR754SW | - | SR754SW | V 309 | - |
| | 315 | 315 | SR 67/SR 716 SW | 280-56/280-55 | - | GP315, GP15, G16R | - | SR716SW | SR716SW | 315 | 315 | SB-AT/SR716SW | SR716SW | HA | SR716SW | V 315 | 315 |
| | 317 | 317 | SR 62/SR 516 SW | 280-58/280-107 | - | GP317, GP17 | - | SR516SW | SR516SW | 317 | 317 | SB-AR/SR516SW | SR516SW | CA | SR516SW | V 317 | 317 |
| | 319 | 319 | SR 64/SR 527 SW | 280-60 | - | GP 319 | - | SR527SW | SR527SW | 319 | 319 | SB-AE/SR527SW | SR527SW | - | SR527SW | V 319 | - |
| | 321 | 321 | SR 65/SR 616 SW | 280-73 | - | GP321, GP21 | - | SR616SW | SR616SW | 321 | 321 | SB-AE/SR616SW | SR616SW | DA/DQJ | SR616SW | V 321 | 321 |
| | 329 | 329 | -/SR 731 SW | - | - | GP18 | SR731SW | SR731SW | SR731SW | 329 | 329 | SR731SW | SR731SW | - | SR731SW | V 329 | 329 |
| | 335 | 335 | -/SR 512 SW | 280-68 | - | - | - | SR512SW | SR512SW | 335 | 335 | SB-AB/SR512SW | SR512SW | - | - | V 335 | - |
| | 337 | 337 | -/SR 416 SW | 280-75 | - | GP337 | - | SR416SW | SR416SW | 337 | 337 | - | SR416SW | - | - | V 337 | - |
| TAVOLA DI COMPARAZIONE PER LE PILE PER OROLOGI | 339 | - | -/SR 614 SW | - | - | - | SR614SW | SR614SW | SR614SW | 339 | 339 | - | SR614SW | - | - | V 339 | - |
| | 341 | 341 | -/SR 714 SW | - | - | - | SR714SW | SR714SW | SR714SW | 341 | 341 | - | SR714SW | - | - | V 341 | - |
| | 344 | 344 | SR 42/SR 1136 SW | - | - | - | SR1136SW | SR1136SW | SR1136SW | 344 | 344 | - | - | - | - | V 344 | - |
| | 346 | 346 | -/SR 712 SW | 280-66 | - | - | - | SR712SW | SR712SW | 346 | 346 | SB-DH/SR712SW | SR712SW | J | - | V 346 | - |
| | 350 | 344 | SR 42/SR 1136 W | 280-19 | - | - | - | - | - | 350 | 350 | - | - | X | - | V 350 | - |
| | 357 | 357/303 | SR 44/SR 1154 W | - | 357/303 | GP357, GP57 | G13 | SR44W | SR44W | 303/357 | 357 | SB-BP/SR44W | SR44W | S | SR44W | V 357 | 357 |
| | 361 | 362/361 | SR 58/SR 721 W | 280-53 | 362/361 | - | G11 | SR721W | SR721W | 361/362 | 361 | S-BK/SR721SW | SR721W | T | SR721W | V 361 | - |
| | 362 | 362/361 | SR 58/SR 721 SW | 280-29 | 362/361 | GP362, GP62 | GS11 | SR721SW | SR721SW | 361/362 | 362 | SB-AK/SR721SW | SR721SW | ZA | SR621SW | V 362 | 362 |
| | 364 | 364/363 | SR 60/SR 621 SW | 280-34 | 364 | GP364, GP64 | GS1 | SR621SW | SR621SW | 364 | 364 | SB-SR621SW | SR621SW | Z | SR621SW | V 364 | 364 |
| | 365 | 365 | -/SR 1116 W | - | - | - | - | SR116W | SR116W | - | 365 | SR116W | SR116W | - | SR116W | - | - |
| TABLA DE EQUIVALENCIAS PARA PILAS DE RELOJ | 366 | 365 | -/SR 1116 SW | 280-46 | - | GP366, GP66 | - | SR116SW | SR116SW | 366 | 366 | SR116SW | SR116SW | WA | SR116SW | - | - |
| | 370 | 371/370 | SR 69/SR 920 W | 280-51 | 371/370 | GP370, GP70 | G6 | SR920W | SR920W | 370-371 | 370 | SB-BN/SR920W | SR920W | MA | SR920W | V 370 | - |
| | 371 | 371/370 | SR 69/SR 920 SW | 280-31 | 371/370 | GP371, GP71 | GS6 | SR920SW | SR920SW | 370/371 | 371 | SB-AN/SR920SW | SR920SW | BA | SR920SW | V 371 | 371 |
| | 373 | 373 | SR 68/SR 916 SW | 280-45 | - | GP373, GP73 | - | SR916SW | SR916SW | 373 | 373 | SB-A/SR916W | SR916SW | JA | SR916SW | V 373 | 373 |
| | 376 | 377/376 | SR 66/SR 626 W | 280-72 | 376/377 | GP76 | G4 | SR626W | SR626W | 376/377 | 376 | SR626W | - | - | SR626W | - | 377 |
| | 377 | 377/376 | SR 66/SR 626 SW | 280-39 | 376/377 | GP377, GP77 | GS4 | SR626SW | SR626SW | 376/377 | 377 | SB-AW/SR626SW | SR626SW | - | SR626SW | V 377 | 379 |
| | 379 | 379 | SR 63/SR 521 SW | 280-59 | - | GP379, GP79 | - | SR521SW | SR521SW | 379 | 379 | SB-AC/SR521SW | SR521SW | H | SR521SW | V 379 | - |
| | 380 | 394/380 | SR936 W | - | 394/380 | - | - | SR936W | SR936W | - | 380 | - | - | - | SR936W | - | - |
| | 381 | 391 | SR 55/SR 1120 SW | 280-27 | - | GP381, GP81 | GS8 | SR1120SW | SR1120SW | 381/391 | 381 | SB-AS/SR1120SW | SR1120SW | M | SR1120SW | V 381 | - |
| | 384 | 392/384 | SR 41/SR 736 SW | 280-18 | 392/384 | GP384, GP84 | GS3 | SR41SW | SR41SW | 384/392 | 384 | SB-A1/SR415W | SR41SW | - | SR41SW | V 384 | - |
| GUIDE DE RÉFÉRENCES DE PILES POUR MONTRES | 386 | 386 | SR 43/SR 1142 W | 280-41/280-21 | 386/301 | GP386, GP86 | G12 | SR43W | SR43W | 301/386 | 386 | SB-B8/SR43W | SR43W | - | SR43W | V 386 | 386 |
| | 389 | 390/389 | SR 54/SR 1130 W | 280-15 | 389/390 | GP389, GP89 | G10 | SR1130W | SR1130W | 389/390 | 389 | SB-BU/SR1130W | SR1130W | K | SR1130W | V 389 | 389 |
| | 390 | 390/389 | SR 54/SR 1130 SW | 280-24 | 389/390 | GP390, GP90 | GS10 | SR1130SW | SR1130SW | 389/390 | 390 | SB-AU/TR1130W | SRI-BO SW | F | SR1130SW | V 390 | 390 |
| | 391 | 391 | SR 55/SR 1120 W | 280-30 | - | GP391, GP91 | G8 | SR1120W | SR1120W | 381/391 | 391 | SB-BS/SR1120SW | SR1120W | - | SR1120W | V 391 | 391 |
| | 392 | 392/384 | SR 41/SR 736 W | 280-13/280-11 | 392/384 | GP392, GP92 | G3 | SR41W | SR41W | 384/392 | 392 | SB-B1/SR41W | SR41W | LA | SR41W | V 392 | 392 |
| | 393 | 393 | SR 48/ SR 754 W | - | - | GP393, GP93 | G5 | SR754W | SR754W | 309/393 | 393 | SB-B3/SR48W | SR48W | V | SR48W | V 393 | 393 |
| | 394 | 394/380 | SR 45/SR 936 SW | 280-17 | 394/380 | GP394, GP94 | GS9 | SR936SW | SR936SW | 394 | 394 | SB-A4/SR936SW | SR936SW | N | SR936SW | V 394 | 394 |
| | 395 | 395/399 | SR 57/SR 927 SW | 280-48/280-20 | 399/395 | GP395, GP95 | GS7 | SR927SW | SR927SW | 395/399 | 395 | SB-AP/SR927SW | SR927SW | W | SR927SW | V 395 | 395 |
| | 396 | 397/396 | SR 59/SR 726 W | 280-52 | - | GP396, GP96 | G2 | SR726W | SR726W | 396/397 | 396 | SB-BL/SR726W | SR726W | - | SR726W | V 396 | 396 |
| | 397 | 397/396 | SR 59/SR 726 SW | 280-28 | - | GP397, GP97 | GS2 | SR726SW | SR726SW | 396/397 | 397 | SB-BL/SR726SW | SR726SW | - | SR726SW | V 397 | - |
| CROSS REFERENCE GUIDE FOR WATCH BATTERIES | 399 | 395/399 | SR 57/SR 927 W | 280-44 | 399/395 | GP399, GP99 | G7 | SR927W | SR927W | 395/399 | 399 | SB-BP/SR927W | SR927W | - | SR927W | V 399 | - |

TYPENVERGLEICHSTABELLE

TESTEN SIE SELBST!

Die wichtigsten Zellen im Schnellcheck

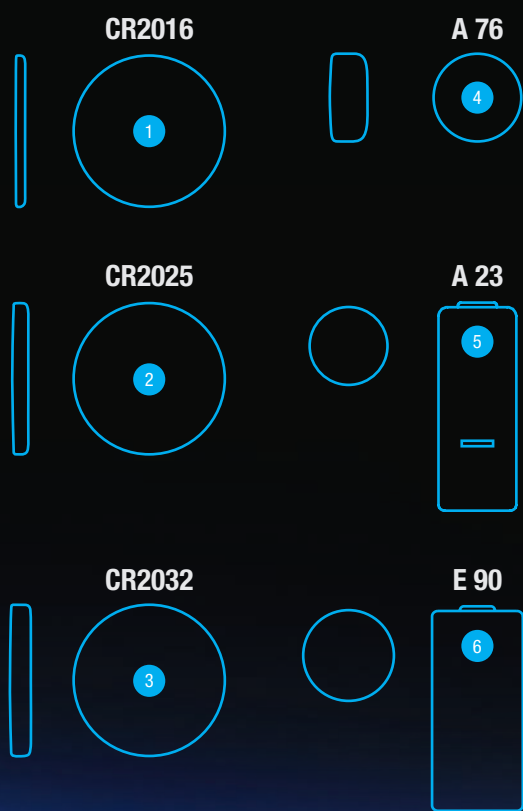

| KNOFZELLEN | ENERGIZER® | IEC | VARTA | DURACELL | PANASONIC | Andere |
|------------|------------|---------|--------|----------|-----------|--------|
| | 1025 | CR1025 | - | - | CR1025 | CR1025 |
| | 1216 | CR1216 | CR1216 | - | CR1216 | CR1216 |
| | 1220 | CR1220 | CR1220 | DL1220 | CR1220 | CR1220 |
| | 1616 | CR1616 | CR1616 | DL1616 | CR1616 | CR1616 |
| | 1620 | CR1620 | CR1620 | DL1620 | CR1620 | CR1620 |
| | 1632 | CR1632 | CR1632 | DL1632 | CR1632 | CR1632 |
| | 2012 | CR2012 | - | - | CR2012 | CR2012 |
| | 1 2016 | CR2016 | CR2016 | DL2016 | CR2016 | CR2016 |
| | 2 2025 | CR2025 | CR2025 | DL2025 | CR2025 | CR2025 |
| 3 2032 | CR2032 | CR2032 | DL2032 | CR2032 | CR2032 | |
| 2430 | CR2430 | CR2430 | DL2430 | CR2430 | CR2430 | |
| 2450 | CR2450 | CR2450 | DL2450 | CR2450 | CR2450 | |
| 4 LR44/A76 | LR44 | V 13 GA | LR44 | LR44 | - | |
| LR43/186 | LR43 | V 12 GA | LR43 | LR43 | LR1142 | |
| EPX625G | LR09 | V 625 A | 625A | LR9/H-D | - | |
| LR54/189 | LR54 | V 10 GA | LR54 | LR54 | LR1130 | |

| SPEZIALZELLEN | ENERGIZER® | IEC | VARTA | DURACELL | PANASONIC | Andere |
|---------------|------------|---------|------------|---------------|-----------|--------|
| | 123 | CR17345 | CR 123 A | 123 | CR123 | DL123A |
| | CR2 | CR17355 | CR 2 | CR2 | CR2 | KCR2 |
| | 2CR5 | 2CR5 | 2 CR 5 | 245 | 2CR5 | KL2CR5 |
| | A11 | - | V 11 A | - | - | - |
| | 5 A23 | LRV08 | V 23 GA | MN21 | LRV08 | - |
| | A27 | - | V 27 A | - | - | - |
| | 6 LR1/E90 | LR01 | LR1 / 4001 | N | LR1 | LR1N |
| | E96 (AAAA) | LR8D425 | AAAA | AAAA / MN2500 | - | - |
| | EPX76 | SR44 | V 76 PX | - | SR44 | - |
| 4LR44/A544 | 4LR44 | V 4034 | 28L | 4LR44 | 4AG13 | |

| HÖRGERÄTEBATTERIEN | ENERGIZER® | IEC | VARTA | DURACELL | PANASONIC | Andere |
|--------------------|------------|------|-------|----------|------------|----------|
| | 10 | PR70 | 10 | DA10 | PR10 (230) | GP ZA10 |
| | 13 | PR48 | 13 | DA13 | PR13 | GP ZA10 |
| | 312 | PR41 | 312 | DA312 | PR312 | GP ZA312 |
| | 675 | PR44 | 675 | DA675 | PR675 | GP ZA675 |

| UHRENBLISTER | ENERGIZER® | IEC | VARTA | DURACELL | PANASONIC | Andere |
|--------------|------------|------|---------|----------|----------------|-------------------|
| | 357/303 | SR44 | V357 | 357/303 | SR44 | 357/303, SR44W |
| | 364/363 | SR60 | V364 | 364 | SR621 | 364, SR621SW |
| | 377/376 | SR66 | V376 | 376 | - | 376, SR626W |
| | 377/376 | SR66 | V377 | 377 | SR626 | 377, SR626SW |
| | 392/384 | SR41 | V384 | 392/384 | SR41 | 392/384, SR41SW |
| | 390/389 | SR54 | V390 | 389/390 | SR1130SW | 390/389, SR1130SW |
| | 391/381 | SR55 | V391 | - | SR1120 | 391/381, SR1120W |
| 392/384 | SR41 | V392 | 392/384 | SR41W | 392/384, SR41W | |