
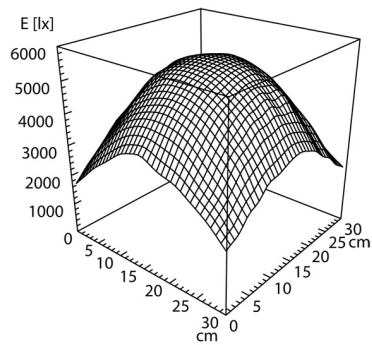
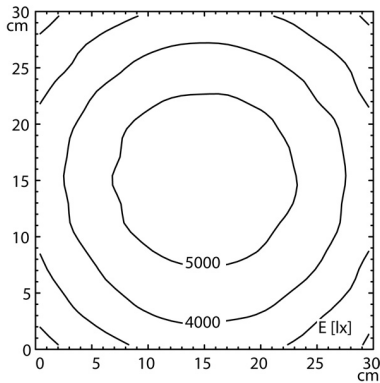


CE



light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
direct ratio
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
system of protection
class of protection
technology
operation
housing
cover
arm
balance of articulation joints
weight (net)
mains lead
fastening
lens, dimensions
lens material
lens, diopters
special features

LED
 electronic plug-in ballast
 100-240 V, 50/60 Hz
 env. 13 W
 approx. 750 lm
 approx. 58 lm/W
 direct
 approx. 100 %
 neutral white
 approx. 4.000 K
 >= 90 (R9>50)
 < 3 SDCM
 20
 II
 multi-stage switchable; continuously dimmable
 multi-function switch
 plastic; untreated; black
 screen, milky; Polyamide
 tubular aluminium section; anodized; aluminium
 coloured anodised
 spring
 env. 2,5 kg
 approx. 3.6 m; mains plug; CEE 7/XVI; BS 1363;
 NEMA 1-15P
 screw-down flange
 Ø 160 mm
 glass
 3,5
 coated magnifier; light characteristic can be
 adjusted with a three-way switch