
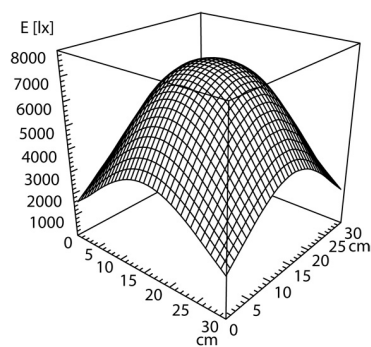


CE

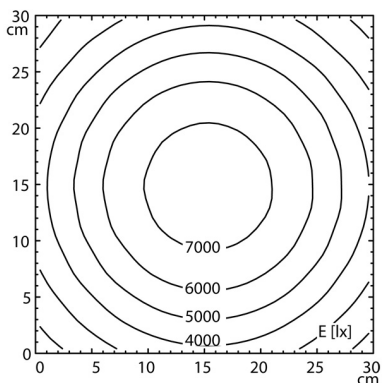

light source
 work equipment
 connected load
 power consumption
 light distribution
 direct ratio
 colour temperature
 colour temperatur
 color rendering index (CRI)
 system of protection
 class of protection
 technology
 operation
 housing
 cover
 arm
 balance of articulation joints
 weight (net)
 mains lead
 fastening
 lens, dimensions
 lens material
 lens, diopters
 special features

LED
 electronic transformer
 100-240 V, 50/60 Hz
 env. 16 W
 direct
 approx. 100 %
 neutral white
 approx. 4.000 K
 >= 90 (R9>50)
 IP20
 I
 multi-stage switchable; continuously dimmable
 multi-function switch
 plastic; ESD-version; black
 screen, milky; Polyamide
 tubular aluminium section; ESD-coat of lacquer;
 black
 spring
 env. 2,6 kg
 approx. 3.5 m; mains plug; Typ 12
 screw-down flange
 Ø 160 mm
 glass
 3,5
 Ra (luminaire) ca. 90; ESD version; light
 characteristic can be adjusted with a three-way
 switch