



CE

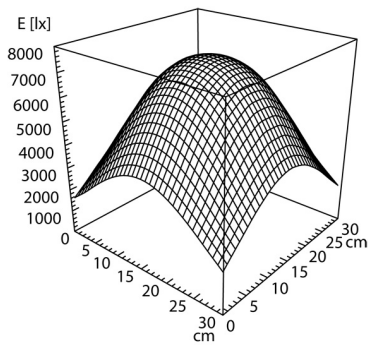

Typ 12

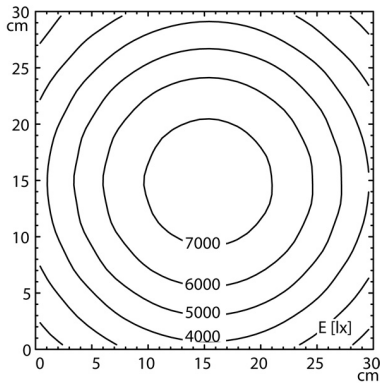

light source
work equipment
connected load
power consumption
light distribution
direct ratio
colour temperature
colour temperatur
color rendering index (CRI)
system of protection
class of protection
technology
operation
housing
cover
arm
balance of articulation joints
weight (net)
mains lead
fastening
lens, dimensions
lens material
lens, diopters
special features

LED
 electronic transformer
 100-240 V, 50/60 Hz
 env. 16 W
 direct
 approx. 100 %
 neutral white
 approx. 4.000 K
 >= 90 (R9>50)
 IP20
 I
 multi-stage switchable; continuously dimmable
 multi-function switch
 plastic; ESD-version; black
 screen, milky; Polyamide
 tubular aluminium section; ESD-coat of lacquer;
 black
 spring
 env. 2,7 kg
 approx. 3.3 m; mains plug; Typ 12
 screw-down flange
 Ø 160 mm
 glass
 3,5
 Ra (luminaire) ca. 90; ESD version; long arms; light
 characteristic can be adjusted with a three-way
 switch