


## Industrial (LR20)

D



### Industry Standard Dimensions

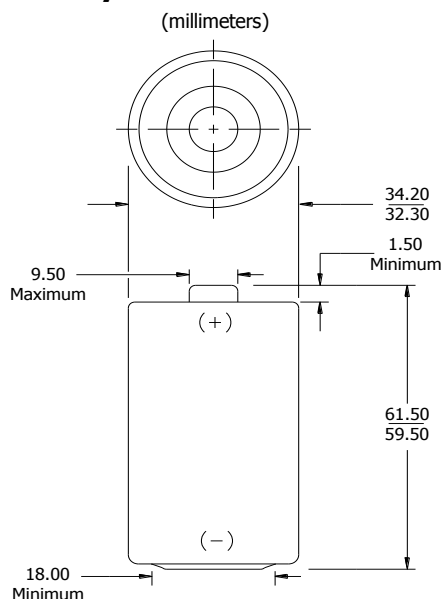


### Specifications

|                         |                                                                              |
|-------------------------|------------------------------------------------------------------------------|
| <b>Classification:</b>  | Alkaline                                                                     |
| <b>Chemical System:</b> | Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> )<br>No added mercury or cadmium |
| <b>Designation:</b>     | IEC-LR20                                                                     |
| <b>Nominal Voltage:</b> | 1.5 volts                                                                    |
| <b>Nominal IR:</b>      | 150 to 300 milliohms (fresh)*                                                |
| <b>Operating Temp:</b>  | -18°C to 55°C                                                                |
| <b>Typical Weight:</b>  | 148.0 grams                                                                  |
| <b>Typical Volume:</b>  | 56.0 cubic centimeters                                                       |
| <b>Jacket:</b>          | Plastic Label                                                                |
| <b>Shelf Life:</b>      | 10 years at 21°C (80% of initial capacity)                                   |
| <b>Terminal:</b>        | Flat Contact                                                                 |


\* For additional information, please reference the [IR technical white paper](#).

### Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

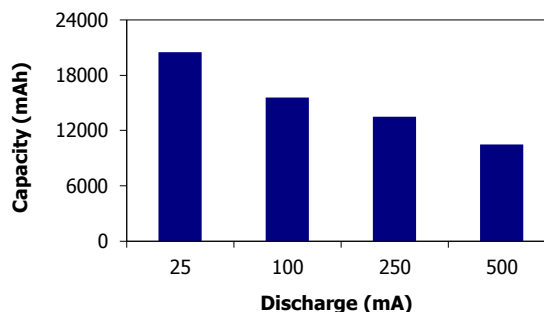

### Industry Standard Testing (21°C):

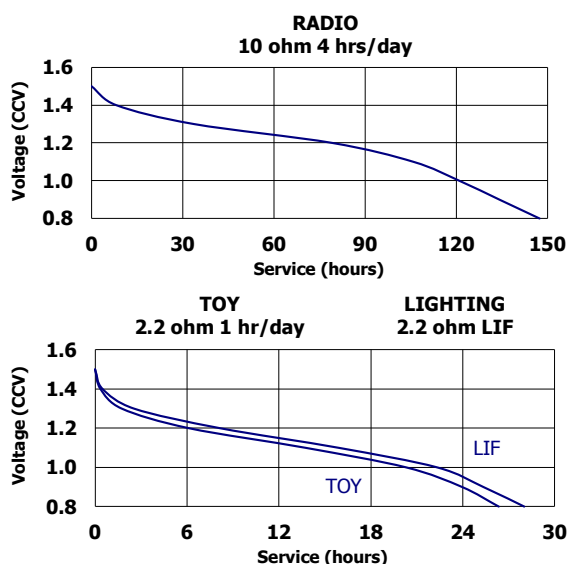

### Battery Selection Indicator

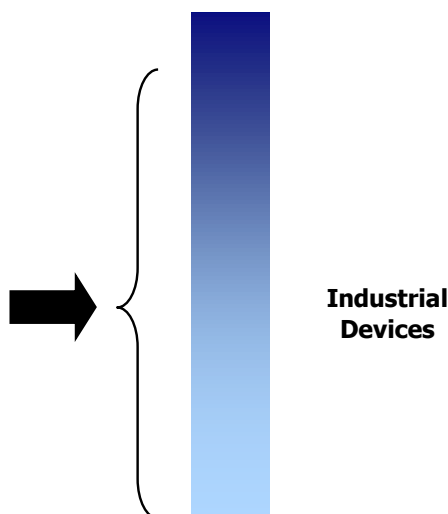

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.