



SPIRAL IL-5400 WORKBENCH LIGHTING

Highly precise inspection lamp



The Spiral IL-5400 is a highly precise inspection lamp that has been designed collaboratively with the leaders of the watchmaking sector. Its ultra-directional light and its high optical signal-to-noise allow an optimum lighting of the working zone with 5400 K colour temperature.

Thanks to the lamp's spring-steel articulated arm, it is possible to examine samples under different lighting angles. The inspection position is easily configurable to meet different user needs. The hollowed lamp head does not dissipate heat and has been conceived to hold a removable magnifier as well as an optional lightbox. The lightbox allows precise inspection regardless of the ambient light. More than 25% productivity gain can be made on quality control operations when using the Spiral IL-5400 lighting system.

L.E.S.S. lighting systems exhibit the same optical properties (colour temperature, uniformity, directionality), regardless of the product line (microscopy, machine vision or workbench lighting). The light quality remains constant throughout the system's lifespan. This consistency gives a stable benchmark at two different levels: over time as well as on the whole assembly line. This allows overall standardisation and time-saving operations.

Advantages


- Comfortable: limited eye fatigue and absence of heat dissipation at the lamp head level.
- Ergonomic: different working positions are possible, limiting neck and lower back pain.
- Evolutive: conceived to hold several accessories such as magnifiers and a lightbox.



SPIRAL IL-5400 WORKBENCH LIGHTING

Technical data


Reference	IL-5400
Product line	Workbench lighting
Colour temperature	5 400 K
Illumination (at 15 cm)	> 2500 lx
Energy consumption	approx. 10 W
Inner diameter	260 x 100 mm 10.2 x 3.4 inches
External dimension	300 x 145 mm 11.8 x 5.7 inches
Articulated arm	800 mm 31.5 inches
Workbench interface diameter	16 mm 0.6 inches
Lifetime	> 20 000 hours
Electronic control unit	Built-in
Power switch	On / Off
Light intensity control	None
Operating ambient temperature	0 - 60 °C
Protection index	IP 24
Lightbox	Yes, as accessory
Magnifying lens	Yes, as accessory
Battery power supply	Yes, as accessory
External power supply	DC 9 V

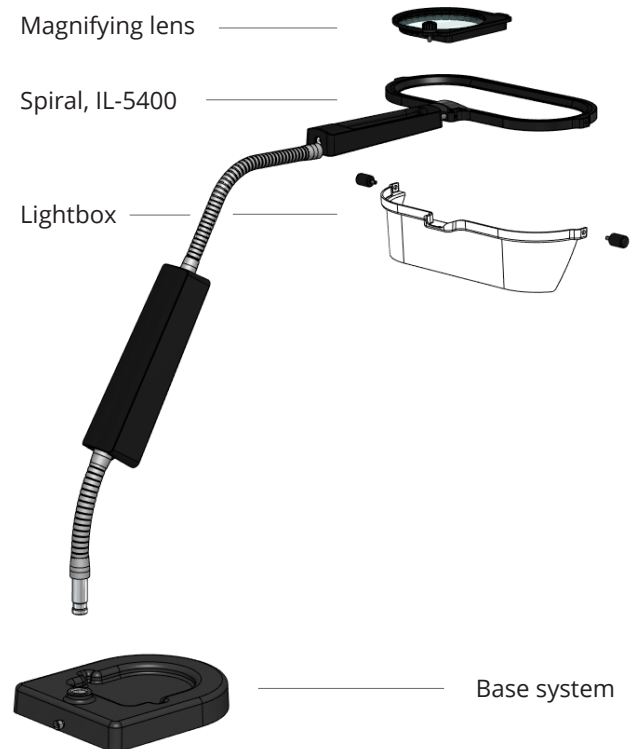

Accessories

- Magnifying lens: it renders a detailed view of the sample with a x2 magnification, allowing a magnified observation with both eyes.
- Lightbox: it extends the rim of the light ring, isolates the inspection area from ambient light and enhances lighting uniformity in a three-dimensional space.
- Base system: it provides a steady base for the lamp on a flat surface when the lamp is not directly fixed to the workbench.

Ultra uniform light
intensity profile



RISK CLASS 0
EN 62471 : 2006

EYE-SAFE
CLASS 1 LASER PRODUCT
ICE 60825-1 2014-05

